RECESSED SPOTLIGHT
4.0098

EXTERIOR | IP67

- Spotlight for very variable use
- Load-bearing capacity of up to 5 tons
- Can be used individually by means of various panels

4.0098 | RECESSED SPOTLIGHT

FOR ILLUMINATING BUILDING FACADES, GREEN AREAS, PARKS AND OUTDOOR FACILITIES.

IP67 | STAINLESS STEEL V4A 1.4571 316Ti | 230 V | EXCL. | CABLE EXCL. | 5t | 650kg | CE

· Protection system IP67
· Entirely made of stainless steel 316Ti 1.4571
· with flush-mounted cover, round or square cover or lock ring
...
· QT32, TC-TEL, HIT-CRI, HSE-E, HIE, HIT-DE-CE, HIT-DE
· Reflector made of high-purity aluminium, symmetrical/asymmetrical
· Adjustable reflector: spot, flood and medium
...
· Temperature-resistant silicon seal
· Toughened safety glass (ESG) – withstands loads of up to 5000 kg, lock ring up to 650 kg
· Cable gland PG 16/21, nickel-plated brass
· With fitted ballast device (depending on the light source)
· Supplied without light source and without cable

ADDITIONAL PARTS

Installation housing 316Ti stainless steel
ø 235 x 300 mm
for flush, round and square cover
4.0098.10.95



anti-glare louver
black, for adjustable Reflector
4.0003.02.00



Installation housing 316Ti stainless steel
ø 235 x 300 mm
for lock ring
4.0098.00.95



anti-glare louver
black, for symm. and asymm. Reflector
4.0003.01.00

rippled glass
with antiskid coating
for flush, round and square cover
4.0231.02.00



double cable gland
PG16/21, brass
4.0004.00.16

rippled glass, frosted
for softer light distribution (light loss approx. -15%)
for flush, round and square cover
4.0231.01.00



TIPP

glass disc, frosted
for softer light distribution (light loss approx. -15%)
for lock ring
4.0230.01.00

PRODUCT LINE

4.0095
Surface spotlights
> Page 144

4.0304
Recessed spotlights (exterior)
> Page 190

< Project
Pöchlarn, Austria
Client: LKD Licht, Austria; Photo: stefanzauner.at

RECESSED SPOTLIGHT 4.0098

EXTERIOR | IP67

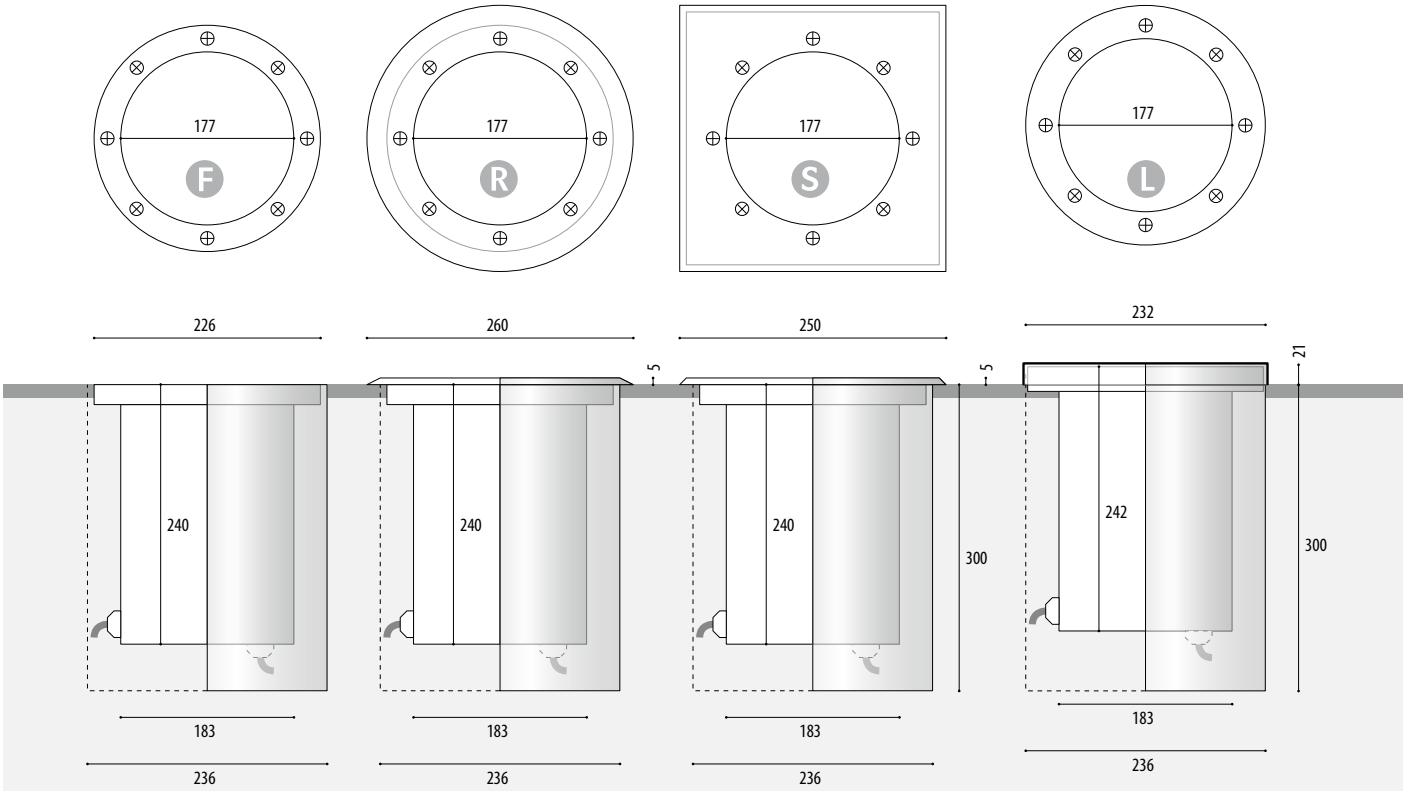

F R S L

Article number	Article number	Article number	Article number	Lamps	Wattage	Voltage	Socket	Temperature	Radation angle	Cable	[V]
SYMMETRIC REFLECTOR, CLEAR TEMPERED GLASS LENS											
4.0098.10.00	**4.0098.20.00**	**4.0098.40.00**	**4.0098.00.00**	QT32	max 250W	230V	E27	150°C	24°	Si, 3x2,5 qmm	F35
4.0098.10.42	**4.0098.20.42**	**4.0098.40.42**	**4.0098.00.42**	TC-TEL	42W	230V	GX24q-3	<75°C	45°	Si, 3x2,5 qmm	T11
4.0098.10.70	**4.0098.20.70**	**4.0098.40.70**	**4.0098.00.70**	HIT-CRI	70W	230V	G12	110°C	19°	Si, 3x2,5 qmm	I33
4.0098.10.71	**4.0098.20.71**	**4.0098.40.71**	**4.0098.00.71**	HSE-E	70W	230V	E27	110°C	35°	Si, 3x2,5 qmm	R32
4.0098.10.72	**4.0098.20.72**	**4.0098.40.72**	**4.0098.00.72**	HIE	70W	230V	E27	110°C	42°	Si, 3x2,5 qmm	L31
ASYMMETRIC REFLECTOR, FROSTED GLASS											
4.0098.11.00	**4.0098.21.00**	**4.0098.41.00**	**4.0098.01.00**	QT32	250W	230V	E27	150°C	30°	Si, 3x2,5 qmm	F45
4.0098.11.70	**4.0098.21.70**	**4.0098.41.70**	**4.0098.01.70**	HIT-CRI	70W	230V	G12	110°C	40°	Si, 3x2,5 qmm	I43
4.0098.11.71	**4.0098.21.71**	**4.0098.41.71**	**4.0098.01.71**	HSE-E	70W	230V	E27	110°C	74°	Si, 3x2,5 qmm	R82
ADJUSTABLE REFLECTOR (+/-15°), CLEAR GLASS LENS, FLOOD											
4.0098.12.00	**4.0098.22.00**	**4.0098.42.00**	**4.0098.02.00**	QT-DE12	150W	230V	R7s	100°C	80°	Si, 3x2,5 qmm	E51
4.0098.12.35	**4.0098.22.35**	**4.0098.42.35**	**4.0098.02.35**	HIT-DE-CE	35W	230V	RX7s	<75°C	80°	Si, 3x2,5 qmm	I91
4.0098.12.70	**4.0098.22.70**	**4.0098.42.70**	**4.0098.02.70**	HIT-DE	70W	230V	RX7s	110°C	80°	Si, 3x2,5 qmm	J51
4.0098.12.71	**4.0098.22.71**	**4.0098.42.71**	**4.0098.02.71**	HST-DE	70W	230V	RX7s	110°C	80°	Si, 3x2,5 qmm	Q51
ADJUSTABLE REFLECTOR (+/-15°), CLEAR GLASS LENS, MEDIUM											
4.0098.16.12	**4.0098.26.12**	**4.0098.46.12**	**4.0098.06.12**	HST-CRI	100W	230V	GX12-1	120°C	35°	Si, 3x2,5 qmm	P82
4.0098.16.35	**4.0098.26.35**	**4.0098.46.35**	**4.0098.06.35**	HIT-CRI	35W	230V	G12	<75°C	35°	Si, 3x2,5 qmm	I81
4.0098.16.52	**4.0098.26.52**	**4.0098.46.52**	**4.0098.06.52**	HST-CRI	50W	230V	GX12-1	80°C	35°	Si, 3x2,5 qmm	P81
4.0098.16.70	**4.0098.26.70**	**4.0098.46.70**	**4.0098.06.70**	HIT-CRI	70W	230V	G12	110°C	35°	Si, 3x2,5 qmm	I83
ADJUSTABLE REFLECTOR (+/-15°), CLEAR GLASS LENS, SPOT											
4.0098.13.12	**4.0098.23.12**	**4.0098.43.12**	**4.0098.03.12**	HST-CRI	100W	230V	GX12-1	120°C	11°	Si, 3x2,5 qmm	P62
4.0098.13.35	**4.0098.23.35**	**4.0098.43.35**	**4.0098.03.35**	HIT-CRI	35W	230V	G12	<75°C	11°	Si, 3x2,5 qmm	I61
4.0098.13.52	**4.0098.23.52**	**4.0098.43.52**	**4.0098.03.52**	HST-CRI	50W	230V	GX12-1	80°C	11°	Si, 3x2,5 qmm	P61
4.0098.13.70	**4.0098.23.70**	**4.0098.43.70**	**4.0098.03.70**	HIT-CRI	70W	230V	G12	110°C	12°	Si, 3x2,5 qmm	I63

< Project
Pöchlarn, Austria
Client: LKD Licht, Austria; Photo: stefanzauner.at

Power supplies Technical details see from page 234.

	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet
	Integratet

NOTE

In public areas we recommend to use a non-slip glass. See accessories.

In case of use of an housing, cable gland must be mounted on the ground. (Please state!)

POW-LED

Version with POW-LED: 4.0304

OPTIONS

Coloured HIT light sources available

IP68

Protection system IP68 (fully ready for operation with light source and cables)

Special brass covers

Cable gland on floor possible

The installation housing can be supplied as an option

Please order the double cable gland for ring assembly separately